


ECOHiLUX照明器具 配光データシート

意匠図




器具品名	LED投光器	保守率	
器具品番	FL2M-100W-40-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	16000lm	上方向	2%
光源	LED	下方向	98%
光源光束	一体型器具のため、器具光束表示	全方向	100%

照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70				50				30		0						
	壁	70	10	30	10	30	10	10	30	70	10	30	10	30	10	10	50	10	30	10	30	10	10	30	10	10
	床	30	10	30	10	30	10	10	30	53	50	41	40	35	34	30	40	39	34	34	30	34	33	30	28	
室 指 数	0.4	54	51	42	40	35	34	30	53	50	41	40	35	34	30	40	39	34	34	30	34	33	30	28		
	0.6	71	66	59	56	51	49	45	70	65	58	55	50	49	45	56	54	50	48	44	49	48	44	42		
	0.8	82	75	70	66	62	59	55	80	74	69	65	61	59	54	67	64	60	58	54	59	57	54	52		
	1	90	81	78	73	70	66	62	88	80	77	72	69	66	62	74	70	67	65	61	66	64	61	59		
	1.25	97	86	86	79	78	73	69	94	85	84	78	77	73	69	81	76	75	72	68	73	71	67	65		
	1.5	102	90	92	83	84	78	74	99	89	90	82	83	77	73	86	80	80	76	73	77	75	72	70		
	2	109	95	100	89	93	85	81	105	93	97	88	91	84	80	92	86	87	82	79	84	81	78	76		
	2.5	113	97	105	93	99	89	85	109	96	102	92	96	88	85	97	90	92	86	84	89	85	83	80		
	3	116	99	109	95	103	92	89	112	98	106	94	100	91	88	100	92	96	89	87	92	88	86	83		
	4	120	102	114	99	109	96	93	115	100	110	97	106	95	93	104	95	101	93	91	96	91	90	87		
5	122	103	117	101	113	98	96	117	102	113	99	110	97	95	107	97	104	95	94	98	93	92	89			
7	125	105	121	103	118	101	100	120	103	117	102	114	100	99	110	99	107	98	97	101	96	95	92			
10	127	106	124	105	122	104	103	122	105	120	103	118	102	101	112	101	110	100	99	104	98	97	94			

配光曲線

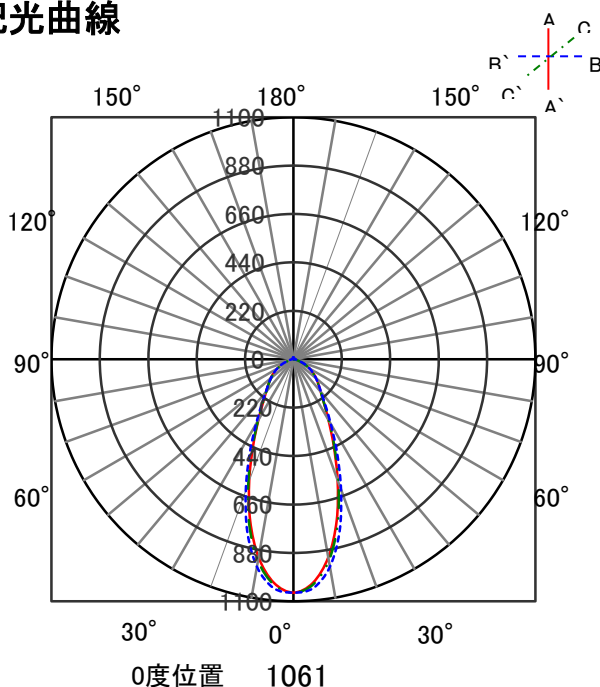

直射水平面照度

