


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL2M-100W-90-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	16000lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



照明率表

		作業面照明率(×0.01)																							
反射率	天井	80								70				50				30		0					
	壁	70	10	30	10	30	10	10	10	70	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	48	45	37	36	30	30	26	47	45	36	35	30	30	26	36	35	30	29	26	30	29	26	24	
	0.6	67	62	55	53	48	47	43	65	61	55	52	48	46	43	53	51	47	46	42	46	46	42	41	
	0.8	76	69	64	60	57	54	50	74	68	63	60	56	54	50	62	59	55	54	50	54	53	50	48	
	1	84	76	73	68	66	62	58	82	75	72	67	65	62	58	70	66	64	61	58	62	61	57	56	
	1.25	92	82	82	75	75	70	66	89	80	80	74	74	70	66	78	73	72	69	66	70	68	65	64	
	1.5	96	84	87	79	80	74	70	93	83	85	78	78	73	70	81	76	76	72	69	74	72	69	67	
	2	102	89	94	84	87	80	77	99	87	92	83	86	79	76	87	81	83	78	75	80	77	75	73	
	2.5	106	91	99	88	93	84	81	103	90	97	87	91	84	81	92	85	88	82	80	84	81	79	77	
	3	108	93	102	90	97	87	84	105	92	99	89	95	86	83	94	87	91	84	82	87	83	81	79	
	4	111	95	106	92	102	90	87	108	94	103	91	99	89	87	97	89	94	87	86	90	86	84	82	
5	113	96	109	94	105	92	90	109	95	106	93	102	91	89	100	91	97	89	88	92	88	86	84		
7	116	97	112	95	109	94	92	111	96	109	94	106	93	92	102	92	100	91	90	94	90	89	86		
10	117	98	115	97	112	96	94	113	97	111	96	109	95	94	104	94	102	93	92	96	91	90	88		

配光曲線

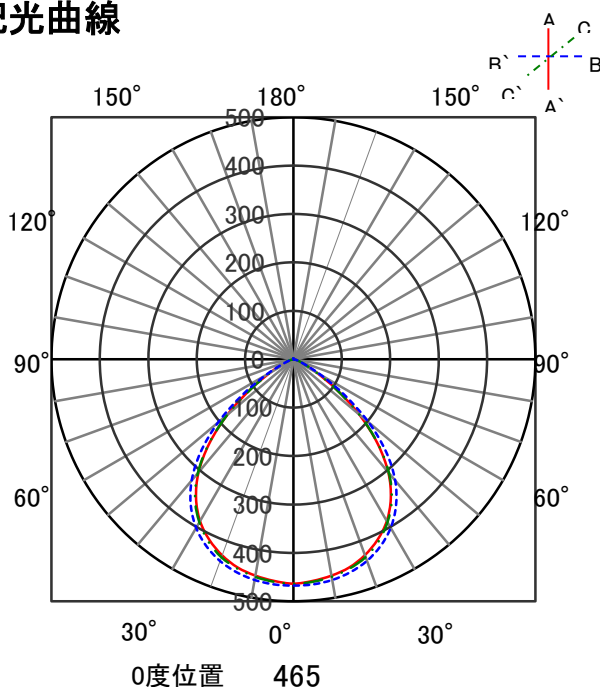

直射水平面照度

