


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL3M-180W-25-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
器具光束	27900lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%



照明率表

		作業面照明率(×0.01)																						
反射率	天井 壁 床	80						70						50						30		0		
		70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	0	0		
室 指 数	0.4	52	49	39	38	32	32	28	51	48	39	38	32	32	28	38	37	32	31	27	31	31	27	26
	0.6	70	64	56	53	48	47	42	68	63	55	53	48	46	42	54	52	47	46	42	46	45	41	40
	0.8	81	74	68	64	59	57	52	79	72	67	63	59	56	52	65	62	58	56	51	56	55	51	49
	1	89	80	76	71	68	64	59	87	79	75	70	67	64	59	72	69	65	63	59	64	62	58	56
	1.25	97	86	85	78	76	72	67	94	84	83	77	75	71	66	80	75	73	70	66	71	69	66	63
	1.5	102	90	91	82	82	77	72	99	88	89	81	81	76	72	85	80	79	75	71	76	74	71	68
	2	109	95	99	89	92	84	80	105	93	97	88	90	83	79	92	86	87	82	78	84	81	78	75
	2.5	113	98	105	93	98	88	85	110	96	102	92	96	88	84	97	90	92	86	83	88	85	82	80
	3	116	100	109	95	103	92	88	112	98	106	94	100	91	88	100	92	96	89	87	92	88	86	83
	4	120	102	114	99	109	96	93	116	101	111	98	106	95	93	105	96	101	94	91	96	92	90	87
5	123	104	118	101	113	99	97	119	103	114	100	110	98	96	107	98	104	96	94	99	94	93	90	
7	126	106	122	104	119	102	100	121	104	118	103	115	101	99	111	100	108	99	98	103	97	96	93	
10	128	107	125	106	123	104	103	123	106	121	105	119	103	102	113	102	112	101	100	105	99	99	96	

配光曲線

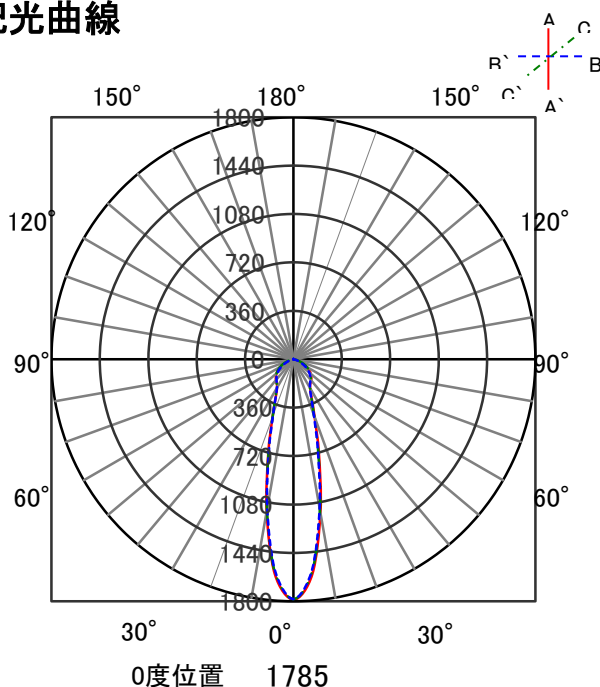

直射水平面照度

