


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL3M-180W-90-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	27900lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



照明率表

		作業面照明率(×0.01)																															
反射率	天井	80								70								50				30				0							
	壁	70	10	30	10	30	10	30	10	70	10	30	10	30	10	30	10	50	30	10	30	10	30	10	30	10	10	0	30	10	10	0	
0.4	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	30	10	10	0
0.6		50	47	37	36	31	30	26	48	46	37	36	30	30	26	36	35	30	30	26	30	29	26	24									
0.8		69	63	56	54	49	47	43	67	62	56	53	49	47	43	54	52	48	47	43	47	46	43	41									
1		79	71	66	62	58	56	51	76	70	65	61	58	55	51	63	60	56	55	51	55	54	50	49									
1.25		87	78	75	70	67	64	60	85	77	74	69	67	64	59	72	68	65	63	59	64	62	59	57									
1.5		95	84	84	77	77	72	68	92	83	83	77	76	72	68	80	75	74	71	67	72	70	67	65									
2		99	87	89	81	82	76	72	96	86	87	80	81	76	72	84	79	78	75	71	76	74	71	69									
2.5		106	92	97	87	90	83	79	102	91	95	86	89	82	79	90	84	86	81	78	83	80	77	75									
3		110	95	103	91	97	87	84	106	94	100	90	95	86	84	95	88	91	85	83	87	84	82	80									
4		112	96	106	93	100	90	87	109	95	103	92	98	89	86	98	90	94	87	85	90	86	84	82									
5		116	98	110	95	106	93	91	112	97	107	94	103	92	90	101	92	98	90	89	93	89	87	85									
7		118	100	113	97	109	95	93	114	98	110	96	106	94	92	103	94	101	92	91	96	91	89	87									
10		120	101	117	99	113	97	96	116	100	113	98	110	96	95	106	96	104	95	93	98	93	92	89									
		122	102	119	101	117	99	98	117	101	115	99	113	98	97	108	97	106	96	95	100	94	94	91									

配光曲線

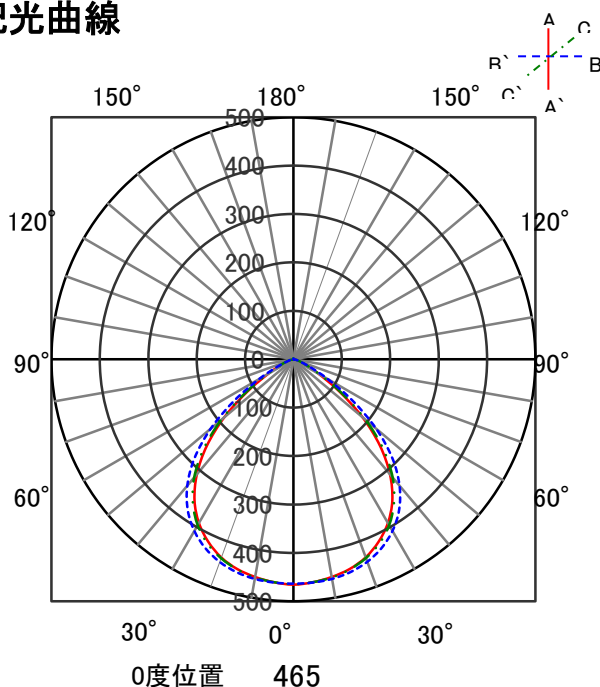

直射水平面照度

