


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	LED投光器	保守率	
器具品番	FL4M-240W-40-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	37200lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

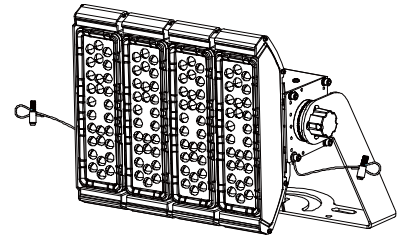

## 照明率表

		作業面照明率(×0.01)																						
反射率	天井	80					70					50			30		0							
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	0	30	10	0						
床		30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0				
室 指 数	0.4	54	51	42	40	35	34	30	53	50	41	40	35	34	30	41	39	35	34	30	34	34	30	29
	0.6	72	66	59	56	51	50	45	70	65	58	56	51	50	45	57	55	50	49	45	50	49	45	43
	0.8	83	75	71	66	62	60	55	81	74	70	66	62	60	55	67	64	61	59	55	60	58	55	53
	1	91	82	79	73	71	67	63	88	80	78	72	70	67	62	75	71	68	66	62	67	65	62	60
	1.25	98	87	87	80	79	74	70	95	86	85	79	78	74	69	82	77	76	73	69	74	72	68	67
	1.5	103	91	92	84	85	79	75	100	89	91	83	83	78	74	87	81	81	77	74	79	76	73	71
	2	109	95	100	90	93	85	82	106	94	98	89	92	85	81	94	87	88	83	80	85	82	79	77
	2.5	113	98	106	93	99	90	86	110	97	103	92	97	89	86	98	91	93	87	85	90	86	84	82
	3	116	100	109	96	104	93	90	112	98	106	95	101	92	89	101	93	97	90	88	93	89	87	84
	4	120	102	115	99	110	96	94	116	101	111	98	107	96	93	105	96	102	94	92	97	92	91	88
5	122	104	118	101	114	99	97	118	102	114	100	110	98	96	107	98	105	96	95	99	95	93	91	
7	125	105	122	103	118	102	100	121	104	118	102	115	101	99	110	100	108	99	98	102	97	96	93	
10	127	106	125	105	122	104	103	122	105	120	104	118	103	102	113	102	111	101	100	105	99	98	96	

## 配光曲線

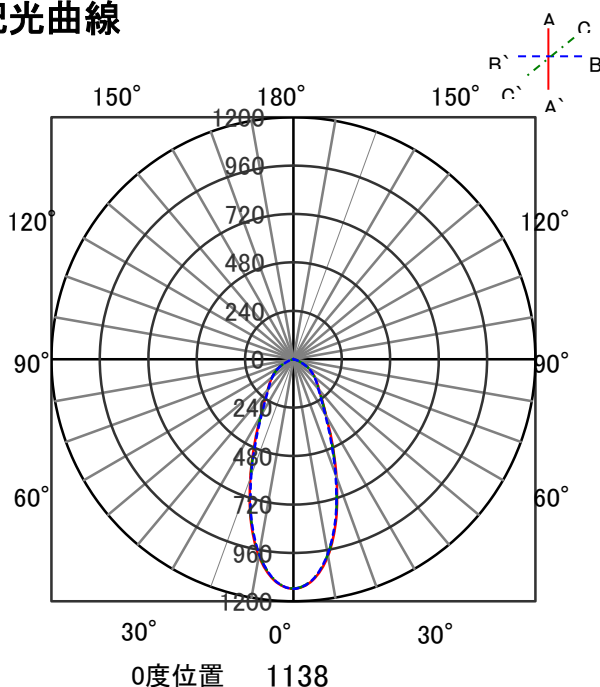

## 直射水平面照度

