


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL5M-300W-60-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	46500lm	上方向	1%
光源	LED	下方向	99%
光源光束	一体型器具のため、器具光束表示	全方向	100%

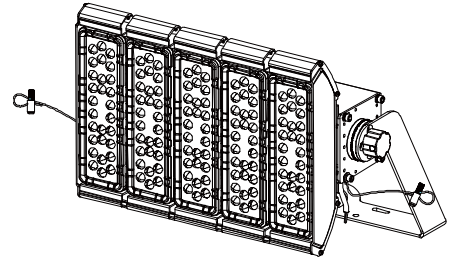

照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70								50				30				0
	壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	10	0				
床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	0				
室 指 数	0.4	53	50	41	39	34	33	29	52	49	40	39	33	33	29	39	38	33	32	29	33	32	29	27		
	0.6	71	66	58	55	50	49	44	69	64	57	55	50	48	44	56	53	49	48	44	48	47	43	42		
	0.8	83	75	70	66	62	59	54	81	74	69	65	61	59	54	67	64	60	58	54	59	57	54	52		
	1	91	82	79	73	70	67	62	88	80	77	72	69	66	62	74	71	68	65	61	66	65	61	59		
	1.25	98	87	87	80	79	74	70	95	86	85	79	78	73	69	82	77	76	72	69	74	71	68	66		
	1.5	103	91	93	84	85	79	75	100	90	91	83	84	78	74	87	81	81	77	74	79	76	73	71		
	2	110	96	101	90	94	86	82	106	94	98	89	92	85	81	94	87	89	84	80	85	82	79	77		
	2.5	114	99	106	94	100	90	87	110	97	103	93	98	89	86	98	91	93	88	85	90	86	84	81		
	3	117	100	110	96	104	93	90	113	99	107	95	102	92	89	101	93	97	90	88	93	89	87	84		
	4	121	103	115	100	110	97	94	116	101	111	98	107	96	93	105	96	102	94	92	97	92	90	88		
5	123	104	118	101	114	99	97	118	103	114	100	111	98	96	107	98	105	96	94	99	94	93	90			
7	125	106	122	104	119	102	100	121	104	118	102	115	101	99	110	100	108	99	97	102	97	96	93			
10	127	107	125	105	122	104	103	123	105	120	104	118	103	102	112	102	111	101	100	104	98	98	95			

配光曲線

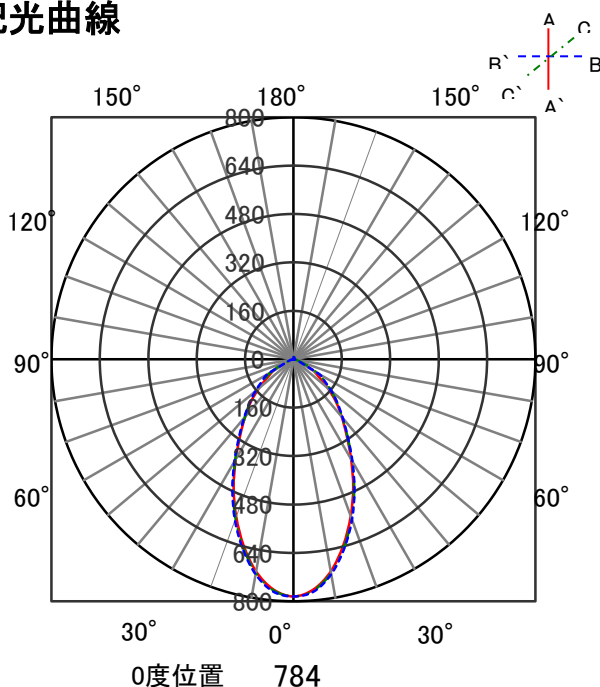

直射水平面照度

