


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL5M-300W-90-K50-R7	良	
部品品名	-	中	
部品品番	-	否	
器具光束	46500lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

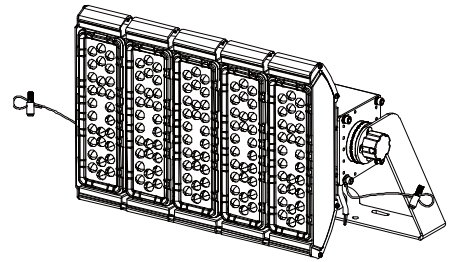

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80								70				50				30				0		
	壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	0		
室 指 数	0.4	51	48	39	37	32	31	27	50	47	38	37	32	31	27	37	36	31	31	27	31	30	27	25
	0.6	71	66	58	55	51	49	45	70	64	58	55	50	49	44	56	54	49	48	44	49	48	44	43
	0.8	81	74	68	64	60	58	53	79	73	67	64	60	57	53	65	62	58	57	52	57	56	52	50
	1	90	81	78	72	70	66	62	88	80	77	72	69	66	61	74	70	67	65	61	66	64	61	59
	1.25	98	87	87	80	80	75	71	96	86	86	79	79	74	70	83	78	77	73	70	75	73	69	67
	1.5	103	91	92	84	85	79	75	100	89	91	83	84	78	74	87	81	81	77	74	79	76	73	71
	2	109	95	101	90	94	85	82	106	94	98	89	92	85	81	94	87	89	84	81	86	82	80	78
	2.5	114	98	106	94	100	90	87	110	97	104	93	98	90	87	98	91	94	88	86	90	87	85	82
	3	116	100	110	96	104	93	90	113	99	107	95	102	92	89	101	93	97	91	88	93	89	87	85
	4	120	102	114	99	109	96	94	116	101	111	98	107	95	93	105	96	101	94	92	97	92	90	88
5	122	103	117	101	113	98	96	118	102	114	100	110	98	96	107	98	104	96	94	99	94	93	90	
7	124	105	121	103	117	101	99	120	103	117	102	114	100	98	110	99	107	98	97	102	96	95	92	
10	126	106	123	104	121	103	102	122	104	119	103	117	102	101	112	101	110	100	99	104	98	97	94	

配光曲線

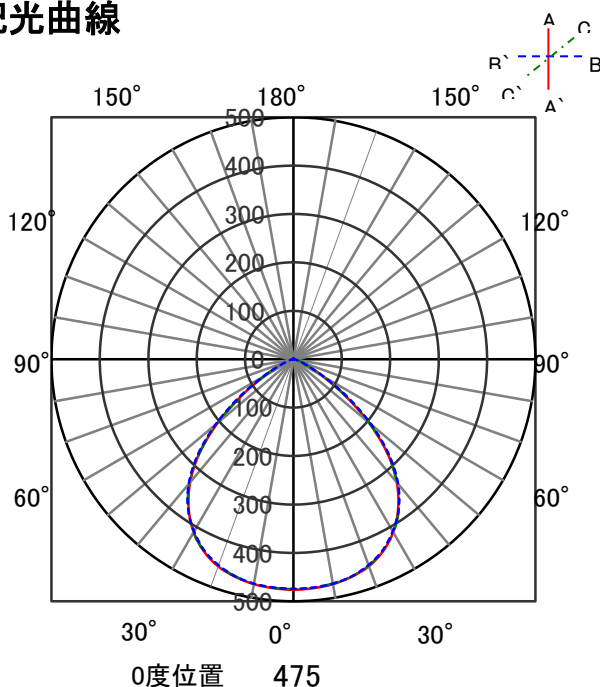

直射水平面照度

