


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	高天井用LED照明ペンダント	保守率	
器具品番	PL75N83-70W	良	-
部品品名	セード:乳白	中	-
部品品番	PLS-410PR/M	否	-
器具光束	5700lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

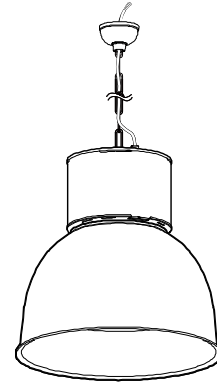

照明率表

		作業面照明率(×0.01)																								
反射率	天井	80				70				50				30				0								
	壁	70	50	30	10	70	50	30	10	50	30	10	10	30	10	10	10	30	10	10	0					
室	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
	0.4	56	53	44	43	38	37	33	55	52	44	42	37	37	33	43	42	37	36	33	37	36	33	31		
	0.6	76	70	63	60	56	54	50	74	68	63	60	56	54	50	61	59	55	54	50	54	53	50	48		
	0.8	82	75	70	65	61	59	54	80	73	68	65	61	58	54	66	63	59	58	54	58	57	53	51		
	1	90	80	77	72	69	65	61	87	79	76	71	68	65	60	73	69	66	64	60	65	63	59	57		
	1.25	97	86	85	78	77	72	68	94	84	83	77	76	72	67	80	75	74	71	67	72	70	66	64		
	1.5	100	88	89	81	81	75	70	97	87	87	80	79	74	70	83	78	77	73	69	74	72	68	66		
	2	106	92	96	86	88	80	76	102	91	93	85	86	80	75	89	82	83	78	74	80	77	73	71		
	2.5	111	95	102	90	94	85	81	107	94	99	89	92	84	80	93	86	88	83	79	84	81	78	75		
	3	113	97	105	92	98	88	84	109	96	102	91	96	87	83	96	89	91	85	82	87	83	81	78		
	4	117	100	110	96	105	92	89	113	98	107	94	102	91	88	100	92	96	89	86	91	87	85	82		
	5	120	101	114	98	109	95	92	115	100	110	97	106	94	91	103	94	100	92	89	94	90	88	85		
	7	123	103	119	101	115	98	96	118	102	114	99	111	97	95	107	97	104	95	93	98	93	91	88		
	10	125	105	122	103	119	101	100	121	103	118	102	115	100	99	110	99	108	98	96	101	96	94	91		

配光曲線

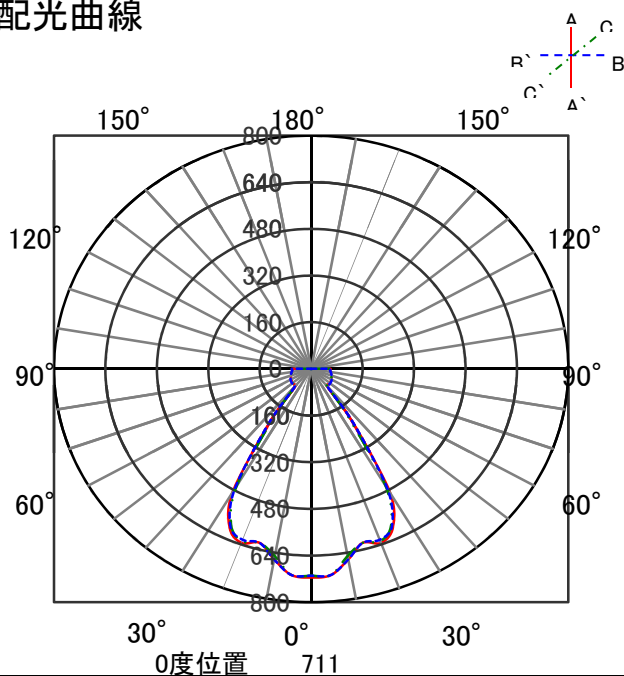

直射水平面照度

