


ECOHiLUX照明器具 配光データシート

意匠図


| | | | |
|------|---------------------|------|------|
| 器具品名 | LED投光器 | 保守率 | |
| 器具品番 | FL5M-300W-25-K50-R7 | 良 | |
| 部品品名 | - | 中 | |
| 部品品番 | - | 否 | |
| | | 器具効率 | |
| 器具光束 | 46500lm | 上方向 | 0% |
| 光源 | LED | 下方向 | 100% |
| 光源光束 | 一体型器具のため、器具光束表示 | 全方向 | 100% |

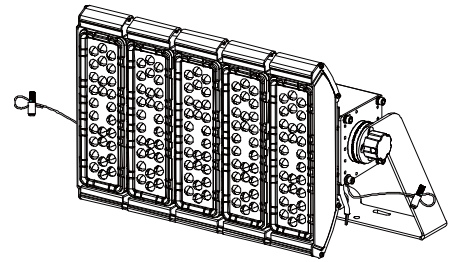

照明率表

| | | 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|----|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | 50 | | | | 30 | | | | 0 | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | 0 | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | |
| 室 指 数 | 0.4 | 52 | 49 | 39 | 38 | 32 | 31 | 27 | 51 | 48 | 39 | 37 | 32 | 31 | 27 | 38 | 37 | 32 | 31 | 27 | 31 | 31 | 27 | 26 |
| | 0.6 | 69 | 64 | 56 | 53 | 48 | 46 | 42 | 67 | 62 | 55 | 52 | 47 | 46 | 41 | 53 | 51 | 47 | 45 | 41 | 46 | 45 | 41 | 39 |
| | 0.8 | 80 | 73 | 67 | 63 | 59 | 56 | 51 | 78 | 72 | 66 | 62 | 58 | 56 | 51 | 64 | 61 | 57 | 55 | 51 | 56 | 55 | 51 | 49 |
| | 1 | 88 | 79 | 76 | 70 | 67 | 64 | 59 | 86 | 78 | 74 | 70 | 66 | 63 | 59 | 72 | 68 | 65 | 63 | 58 | 63 | 62 | 58 | 56 |
| | 1.25 | 96 | 85 | 84 | 77 | 76 | 71 | 66 | 93 | 84 | 82 | 76 | 75 | 71 | 66 | 79 | 75 | 73 | 70 | 66 | 71 | 69 | 65 | 63 |
| | 1.5 | 101 | 89 | 90 | 82 | 82 | 76 | 72 | 98 | 87 | 88 | 81 | 81 | 76 | 71 | 84 | 79 | 78 | 74 | 71 | 76 | 73 | 70 | 68 |
| | 2 | 108 | 94 | 98 | 88 | 91 | 83 | 79 | 104 | 92 | 96 | 87 | 89 | 82 | 79 | 91 | 85 | 86 | 81 | 78 | 83 | 80 | 77 | 75 |
| | 2.5 | 112 | 97 | 104 | 92 | 97 | 88 | 84 | 109 | 95 | 101 | 91 | 95 | 87 | 84 | 96 | 89 | 91 | 86 | 83 | 88 | 84 | 82 | 79 |
| | 3 | 115 | 99 | 108 | 95 | 102 | 91 | 88 | 111 | 98 | 105 | 94 | 100 | 90 | 87 | 99 | 92 | 95 | 89 | 86 | 91 | 87 | 85 | 83 |
| | 4 | 119 | 101 | 113 | 98 | 108 | 95 | 93 | 115 | 100 | 110 | 97 | 105 | 94 | 92 | 104 | 95 | 100 | 93 | 91 | 96 | 91 | 89 | 87 |
| 5 | 122 | 103 | 117 | 100 | 112 | 98 | 96 | 117 | 102 | 113 | 99 | 109 | 97 | 95 | 107 | 97 | 104 | 95 | 93 | 98 | 94 | 92 | 89 | |
| 7 | 125 | 105 | 121 | 103 | 118 | 101 | 99 | 120 | 103 | 117 | 102 | 114 | 100 | 99 | 110 | 100 | 107 | 98 | 97 | 102 | 96 | 95 | 93 | |
| 10 | 127 | 106 | 124 | 105 | 122 | 103 | 102 | 122 | 105 | 120 | 104 | 118 | 102 | 101 | 112 | 101 | 111 | 100 | 99 | 104 | 98 | 98 | 95 | |

配光曲線

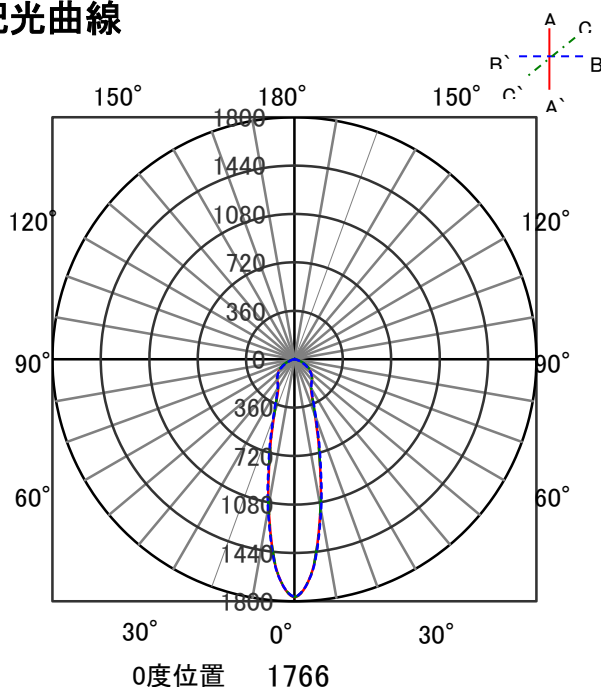

直射水平面照度

